


# Live Measurements



| Return Air |          | Supply Air |                 |
|------------|----------|------------|-----------------|
| 68.1 °F    | Wet Bulb | 57.4 °F    | Target Dry Bulb |
| 68.4 °F    | Dry Bulb | 61.3 °F    | Dry Bulb        |

| Suction Line |                  | Liquid Line |                   |
|--------------|------------------|-------------|-------------------|
| 58.6 °F      | Temperature      | 109.1 °F    | Temperature       |
| 130.8 Psig   | Pressure         | 408.2 Psig  | Pressure          |
| 13.4 °F      | Actual Superheat | 8.9 °F      | Actual Subcooling |
| 10.3 °F      | Target Superheat | 9.9 °F      | Target Subcooling |
| 45.2 °F      | Vapor Saturation | 118.0 °F    | Liquid Saturation |
| 102.5 °F     | Outdoor Dry Bulb | R-410A      | Refrigerant Type  |

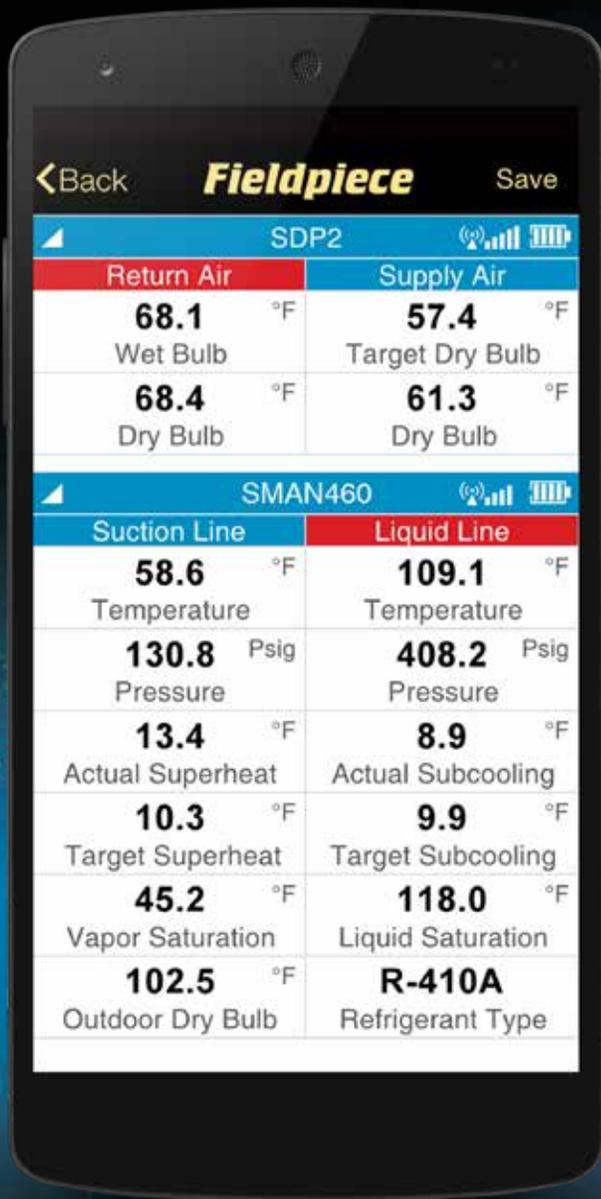

**In The Palm Of Your Hand**

**NEW! JL2 Transmitter and  
Job Link™ App**



Test Tools HVACR Pros Trust


# Inspect, Connect, Report

The Job Link Mobile App is a powerful tool that HVACR professionals can run their entire job through.

View live measurements, calculations, and diagnostics for free.

Do even more with a Job Link subscription plan. Create professional reports and invoices.

Save system measurements and customer details. Fill out inspection checklists. Take photos and notes for each system. It's all stored in the cloud so you can access your data while on the go.

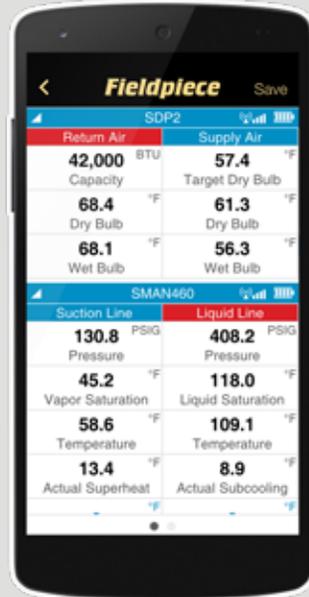

- Live Measurements
- Trusted Diagnostics
- Inspection Checklists
- Cloud Storage
- Email Professional Reports
- Power and System Efficiency Calculations



Wireless Digital Manifolds models  
SMAN4, SMAN440, SMAN460



Wireless Transmitter  
model JL2

Wireless Dual In-duct  
Psychrometer model SDP2



Wireless Clamp Meter  
model SC660

