

Deep vacuum
measurement

**Standalone
Vacuum Gauge**

Model SVG2



Professional-grade
instruments for field service

- Can measure deep vacuums between 50 and 2000 microns.
- High and low level alarms indicate the desired vacuum is reached.
- Audible and visual indicators.
- Increasing, decreasing, and stable measurement indicators.
- Magnetic hanger.
- Protective rubber boot.




Standalone Vacuum Gauge

Model SVG2

The SVG2 is designed with the HVACR technician in mind. The SVG2 is a portable standalone vacuum gauge, allowing the technician to evacuate a system of contaminants and moisture. The SVG2 comes with a rugged rubber boot and a magnetic hanger to make the technician's job easier.

Features	
Versatile	<ul style="list-style-type: none"> ■ Measure deep vacuums in microns (Hg). ■ High and low alarms for setting target vacuum. ■ Audio and visual indicators for alarm. ■ Special display indicates increasing, decreasing, and stable readings. ■ Overload indication of "OL". ■ "T" fitting included.
Rugged	<ul style="list-style-type: none"> ■ Rubber boot helps protect the meter during bangs and drops.
Easy to use	<ul style="list-style-type: none"> ■ Magnetic hanger for hands free operation. ■ Standard 9V battery. ■ Auto-off to save battery life.

Specifications	
Operating environment:	32°F to 122°F at <75%RH.
Measurement range:	50 to 2000 microns (Hg).
Accuracy:	±10 microns (50 to 1000 microns), ±10% (greater than 1000 microns).
Pressure overload:	500Psi.
Battery:	9V (included), with low battery indicator.
Auto-off:	5 min. measuring atmospheric pressure.

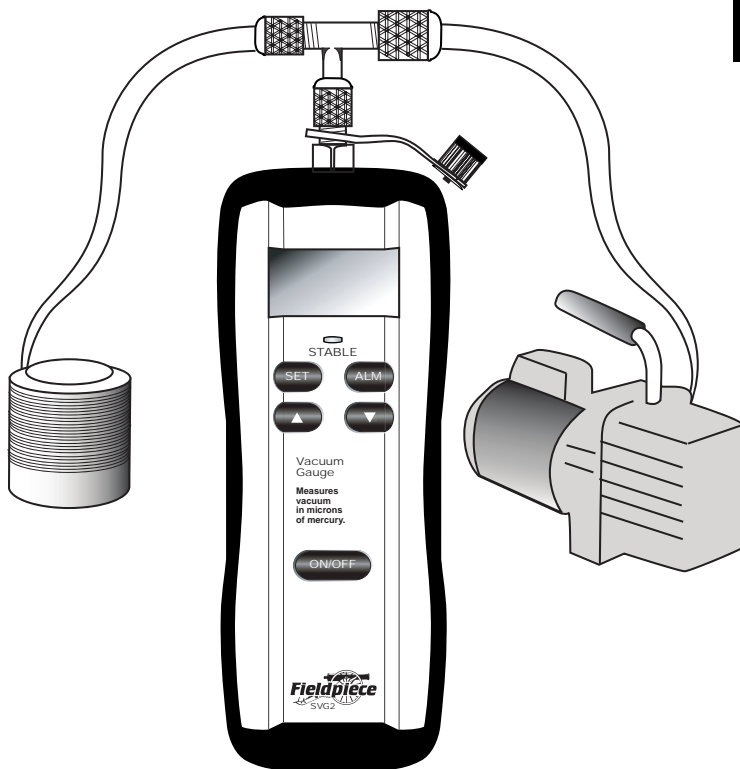

Display Indicators

— = = INCREASING

= = _ DECREASING

SEb STABLE



580 West Central Avenue Suite A
Brea, California 92821
Phone: (714) 257-9060
Fax: (714) 257-9069

www.fieldpiece.com

MADE IN TAIWAN

SVG2 setup for vacuum on an A/C system.

One side of the "T" to the service port.

Other side of the "T" to the vacuum pump.

Model: SVG2



8 72641 00176 6